



**SEMI-MOUNTABLE OUTFALL
KERB & CHANNEL SD 407**
(VicRds SM3 kerb)
Layback required for vehicle crossings.

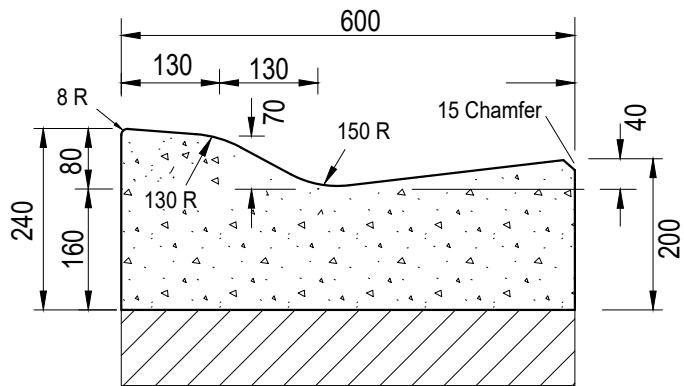


**LOCAL ROAD SEMI-MOUNTABLE
KERB & CHANNEL SD 408**

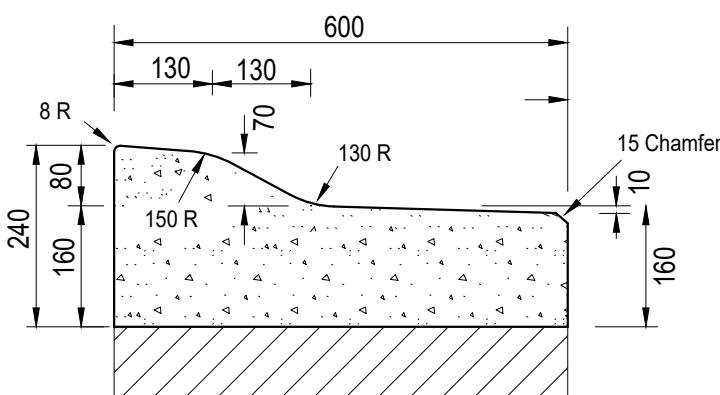


**LOCAL ROAD SEMI-MOUNTABLE
OUTFALL KERB & CHANNEL SD 409**

NOTES:

1. Joint spacing at 3m centres.
2. All profiles on a bedding of 20 mm Class 2 fine crushed rock, min. depth 75 mm.
3. Concrete strength to be 25MPa. at 28 days.
4. Transition from one kerb profile to another should take place over a 5m length.
5. Plastic Fibre mesh additive to be used in median and splitter island kerbs in accordance with manufacturer recommendations.

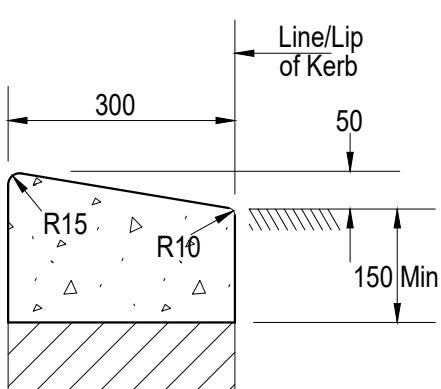

**MOUNTABLE EDGE STRIP
FLUSH - SD410**
(VicRds Kerb M1)

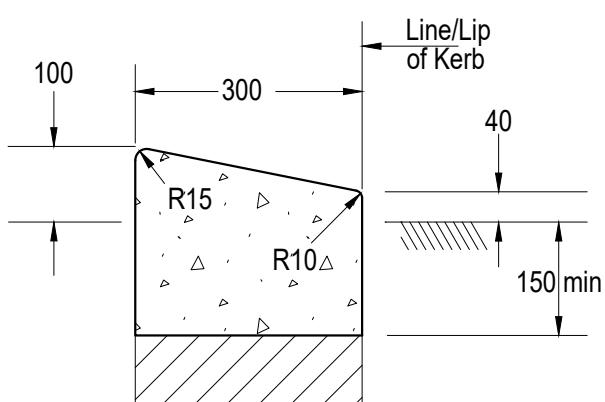

**MOUNTABLE EDGE STRIP
RAISED - SD411**
(VicRds Kerb M4)



SCALE: 1:10

DATE: Dec 2012

APPROVED:

MANAGER ENGINEERING SERVICES

DRAWN: S.R / P.J.D

CHECKED: T.T

LAST AMENDED: Dec 2025

SD 407 - 411

PAGE 1 OF 1

KERB PROFILES